

Fabricated Castors



6000 Series (Swivel)


Size: 100mm, 125mm, 160mm, 200mm & 250mm

6050 Series (Fixed)

Size: 100mm, 125mm, 160mm, 200mm & 250mm


Extremely heavy duty fabricated swivel & fixed castors. Precision bearings in swivel head and wheel on 160mm, 200mm and 250mm diameters. Available with cast iron or polyurethane wheels.

Castor Reference and Load Capacity

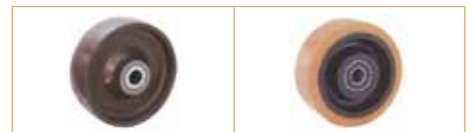

Wheel Diam.	Tread width (mm)	Castor Type	Castor Height	Plate size	Bolt Hole spacim' (mm)	Bolt Diam.	Swiv. Rad.	Cast Iron	Polyurethane
4" 100mm	CI=45 SUB=50	Swivel	145mm	135 x 110mm	105 x 80/75mm	10mm	92mm	TSH-100-CI1H 320kg	100-6000-SUB 450kg
		Fixed	145mm	135 x 110mm	105 x 80/75mm	10mm	-	TFH-100-CI1H 320kg	100-6050-SUB 450kg
5" 125mm	CI=45 SUB=50	Swivel	170mm	135 x 110mm	105 x 80/75mm	10mm	110mm	TSH-125-CI1H 630kg	125-6000-SUB 550kg
		Fixed	170mm	135 x 110mm	105 x 80/75mm	10mm	-	TFH-125-CI1H 630kg	125-6050-SUB 550kg
6" 160mm	60mm	Swivel	205mm	135 x 110mm	105 x 80/75mm	11mm	137mm	-	160-6000-SUB 860kg
		Fixed	205mm	135 x 110mm	105 x 80/75mm	11mm	-	-	160-6050-SUB 860kg
8" 200mm	60mm	Swivel	245mm	135 x 110mm	105 x 80/75mm	11mm	166mm	-	200-6000-SUB 1200kg
		Fixed	245mm	135 x 110mm	105 x 80/75mm	11mm	-	-	200-6050-SUB 1200kg
10" 250mm	80mm	Swivel	305mm	200 x 160mm	160 x 120mm	14mm	199mm	-	250-6000-SUB 1700kg
		Fixed	305mm	200 x 160mm	160 x 120mm	14mm	-	-	250-6050-SUB 1700kg

OPTIONAL EXTRA



Combined Swivel and Wheel Brake

Available on 125mm, 160mm, 200mm and 250mm sizes. Foot operated brake simultaneously brakes both wheel and swivel head. To order add suffix '**SWB**' to castor reference.

Swivel Radius

The swivel radius is increased when brakes are fitted.

125mm wheels: increased by 40mm
 160mm wheels: increased by 20mm
 200mm wheels: increased by 20mm
 250mm wheels: increased by 20mm