


# Gate & Low Level Castors

## Gate Castors

Heavy duty 4" fixed castor is designed to help support a gate where either end of a gate needs support and/or there is some variation in level of ground (3" maximum compression of spring with 70kg force). Consideration therefore needs to be given as to the location of this castor on the gate. Fixing via 2 x 10mm holes. Fitted with rubber tyred, roller bearing wheels.

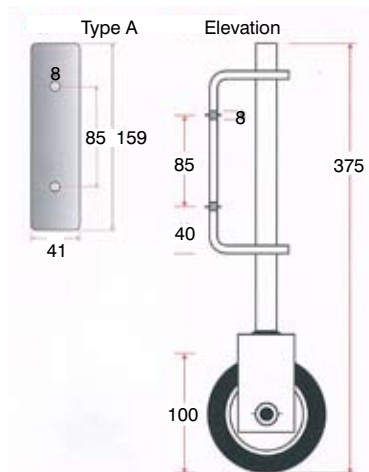

**Light Duty**  
The light duty swivel version is 280mm overall height with a 100mm fixing plate and 60mm centres. Fitted with 4" rubber tyred wheels having a load capacity of 60kg.



## Scene Shifter - Industrial Skates

Range of scene shifters and industrial skates for low level movement. Available from 35mm to 125mm wheel diameters. Ideal for moving scenery. Load capacity 300Kg to 460Kg.

Wheel Diam.	Tread Width	Load Capacity	Plate/Bolt Hole Dimensions		Castor Height	Wheel Type	Castor Ref
			Plate	Bolt Centres			
35mm	28mm	300Kg	85mm x 85mm	55mm x 55mm	85mm	Polyurethane	MINISS
50mm	14mm	360Kg	150mm x 110mm	105mm x 80mm	98mm	Polyurethane	MINISS-50mm
4"/100mm	40mm	460Kg	150mm x 110mm	105mm x 80mm	162mm	Polyurethane	BS4-100-PT04/X
5"/125mm	40mm	460Kg	150mm x 110mm	105mm x 80mm	184mm	Polyurethane	BS4-125-PT04/X

## Appliance Rollers

Easily move refrigerators, and other heavy domestic appliances. Not recommended for cushioned vinyl floors and hardwood floors. 420mm x 80mm extendable to 640mm. Overall height: 38mm. Load capacity: 200kg (Per pair)



## 50mm Twin Low Level Castors

Twin wheel castors are only 64mm overall height with twin 50mm wheels. On a smooth hard floor these castors are able to carry up to 270kg per castor. Suitable for use on concert grand piano-fortes, fire proof filing cabinets, safes and other such heavy equipment. Available with twin steel, polyurethane or nylon wheels.

Wheel Diam.	Overall Height	Swivel Radius	Tread Width	Load Capacity	Wheel Type	Castor Ref
2" 50mm	64mm	50mm	14mm	160kg 270kg 160kg	Twin Polyurethane Twin Steel Twin Nylon	2SL 050 PTOL 2SL 050 STOL 2SL 050 NYOL